
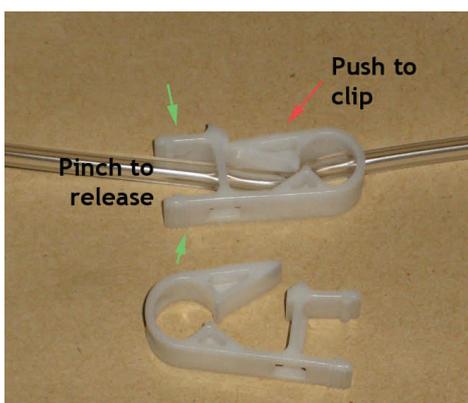


This document provides the basic installation guide for connecting and installing the waste ink bag or box kit to your inkjet printer.



Installing Your Kit

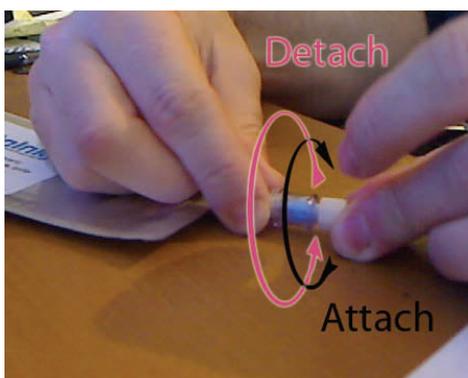

1. Visit <http://www.octoinkjet.co.uk/wib/> ...to locate the instructions for accessing, locating and freeing your particular printers waste ink tube.
2. Make any modifications to the printers case/trapdoor to allow the tubing to exit the printer at a height no greater than the bottom of the printhead (*usually 2 inches from the base of the printer*)

Note: *The height is important to avoid backflow into the printhead which promotes clogging, ink mixing and other undesirable issues*
3. Once you the printers waste ink tube is available and accessible, push your kits free barbed end (shown left) into the printers original waste tube.
This should provide a tight attachment to the waste ink tube.
4. Once you have completed any additional modifications required by your printer, attach the bag to the tubing by pushing and rotating the white luer fitting into the bag valve as shown left.
5. Make sure the clip/clamp on the tubing is **not** closed or clamped as this will stop any ink reaching the bag and cause a backflow.

Venting Air/Ink

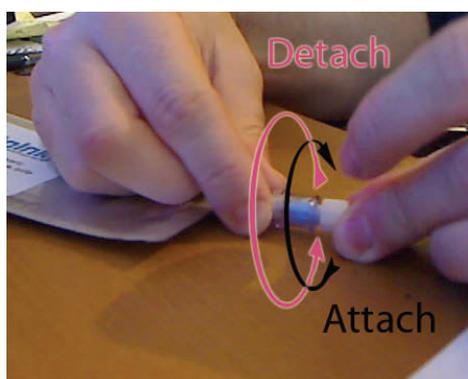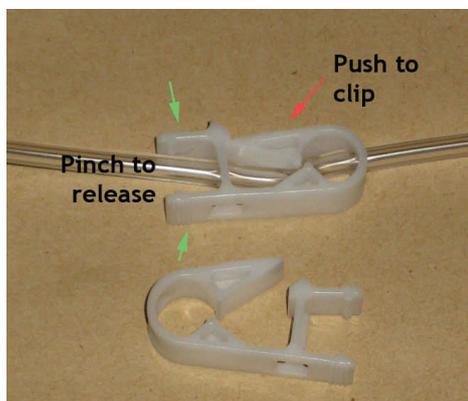

Air and ink will build up in the bag as your printer runs cleaning cycles so it's important to:

- vent air from the bag before it becomes over inflated
 - empty the ink from the bag to avoid overfilling.
1. Turn off your printer
 2. Close the clamp threaded over the tubing to stop any ink flow from the printer while you're carrying out the venting process.
 3. Disconnect the fitting from the valve by rotating it off the valve as shown left in pink (anti-clockwise)
 4. Carry the bag to a sink and hold the bag upright (valve at top) over this while working to avoid any ink spillage.

Use the spare luer fitting that came with your kit to connect to the bag valve thus opening the valve and allowing air and ink out of the bag.

- To vent air gently press the bag together to force air out of the bag while monitoring for any ink bubbles.
 - To vent/empty ink from the bag carefully tip the ink out into a suitable container for proper disposal.
5. Remove the vent fitting and re-attach the bag to the kit tubing as before.
 6. Release the clamp/clip and turn the printer back on.

IMPORTANT: The chemicals used in printer inks vary from manufacturer to manufacturer and as such you should check with your supplier as to the best/most-appropriate method of disposal for your country/state/area.

If in doubt:

- Find a suitably empty (and rinsed) rigid container
- Empty the ink into this container and seal the top
- Dispose of the container your unrecycled waste

It is not ideal but does follow the same disposal routine as many cartridges.

Support: info@octoinkjet.co.uk